

4-way pneumatic valves for pipe connection/sub-base mounting


5/2



Port size	Orifice (mm)	Flow factors (L/min)	Admissible differential pressure bar			Fluid temp. °C	Seat disc	Reference numbers				Power consumption (W)		Wt. (g)	El. Part Group *	Dim ref.	
			Min	Max				Global valve reference	Valve reference no.	Housing	Coil	DC	AC				
G		Qn		DC	AC	Gas											DC

Aluminium alloy and brass body/Pipe mounting

5/2 - Pilot operated -





1/8	4	400	1	10	10	75	NBR	-	341L9101	8993	488980	2.5	2	270	1	42
-----	---	-----	---	----	----	----	-----	---	----------	------	--------	-----	---	-----	---	----

Table continued on page 198

Notes:

* See Electrical Parts Group table at end of section

4-way pneumatic valves for pipe connection/sub-base mounting

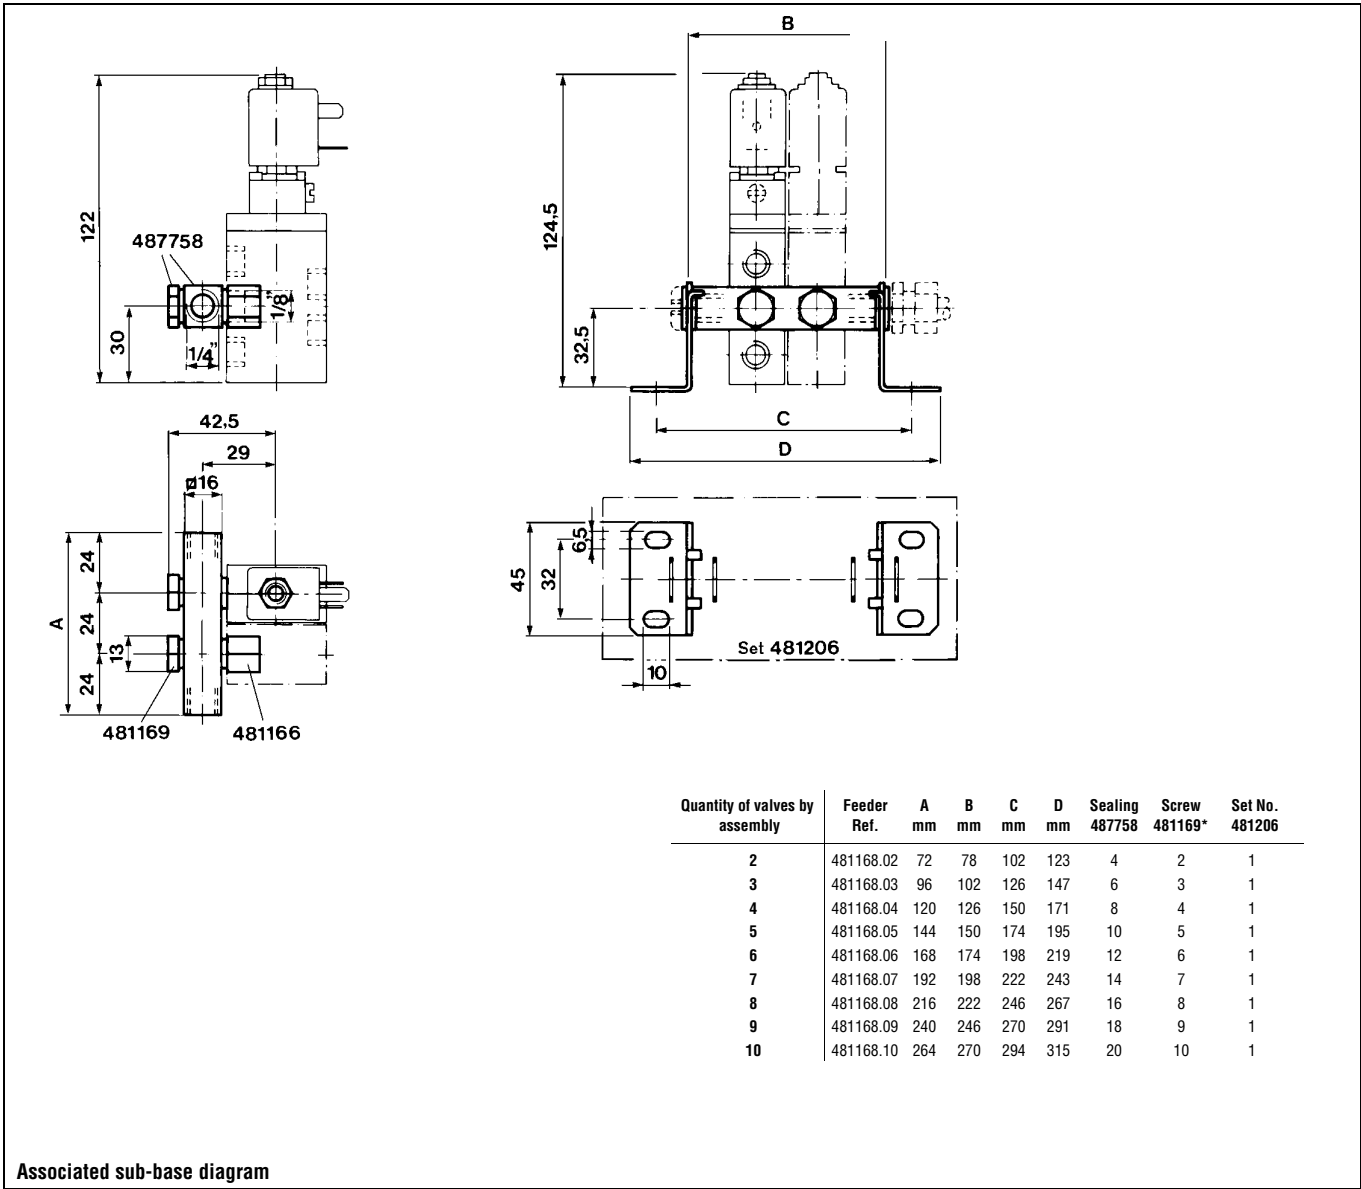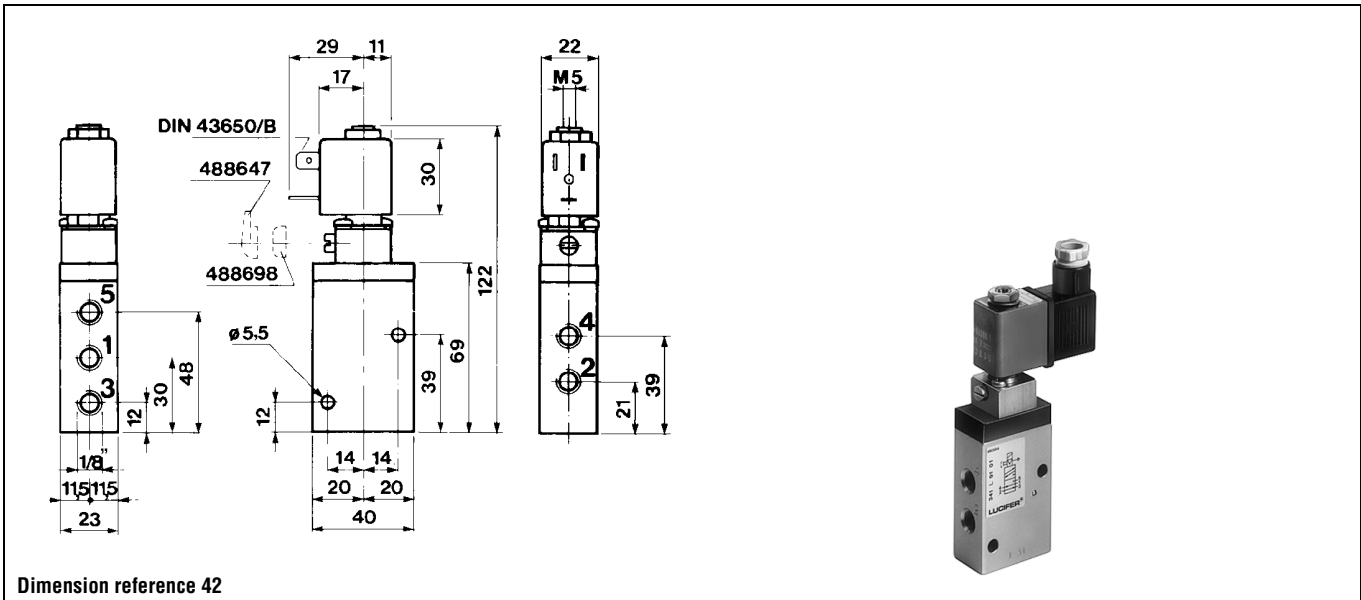


4-way pneumatic valves for pipe connection/sub-base mounting

Port size	Orifice (mm)	Flow factors (L/min) Qn	Admissible differential pressure bar			Fluid temp. °C Gas	Seat disc	Reference numbers				Power consumption (W)	Wt. (g)	El. Part Group *	Dim ref.
			Min	DC	Max AC			Global valve reference	Valve reference no.	Housing	Coil	DC	AC		


Aluminium alloy and brass body/Pipe mounting

5/2 - Two solenoids and main pressure supply -



1/8	4	315	2	10	10	75	NBR	-	347L9101	8993	488980 ¹	2.5	2	430	1	117
-----	---	-----	---	----	----	----	-----	---	-----------------	-------------	----------------------------	-----	---	-----	---	-----

5/2 - Pilot operated -



Anod. aluminium body/Pipe mounting

1/4	8	640	1	40	40	75	NBR	7341BAG2KN00	341B02 ²	2995	481865	9	8	1700	2	39
	8	640	1	40	40	75	NBR			4270	481000	8	8	1800	2	
	8	1000	1	15	15	75	NBR	7341BAG2PN00	E341B01	2995	481865	9	8	1700	2	38
	8	1000	1	15	15	75	NBR			4270	481000	8	8	1800	2	

Table continued on page 200


Notes:

* See Electrical Parts Group table at end of section


1. Please order two of these items per valve

2. Valve with pilot return pipe on exhaust port


4-way pneumatic valves for pipe connection/sub-base mounting

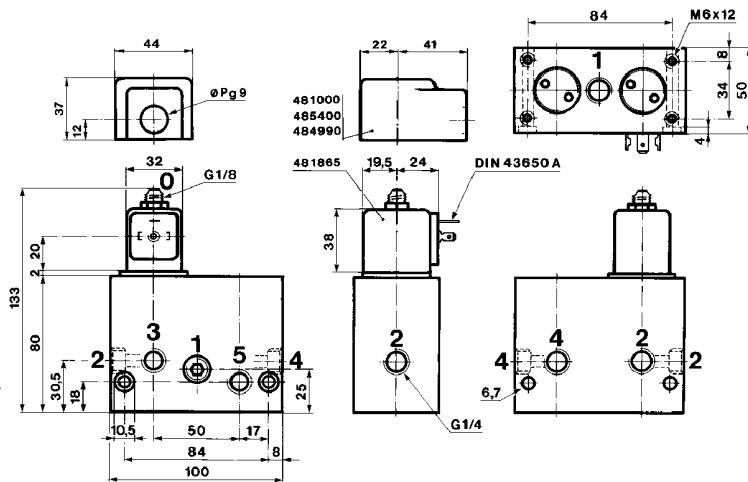

Dimension reference 38

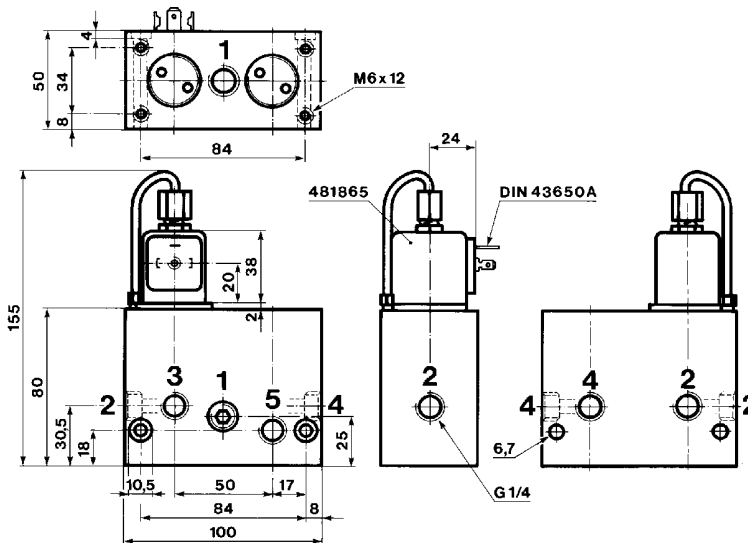

Dimension reference 39

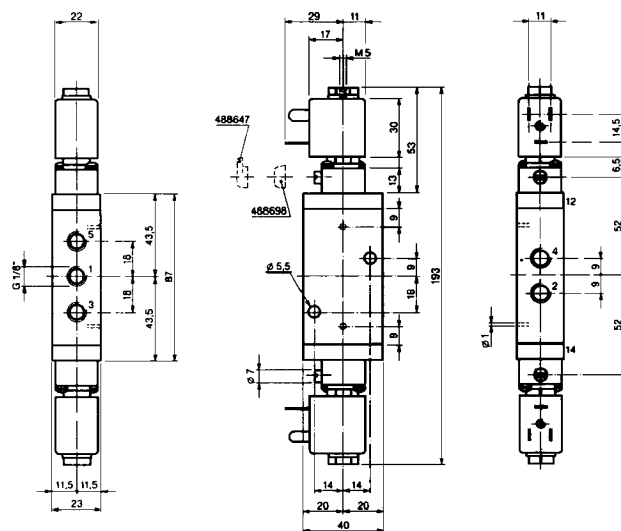


Dimension reference 117

4-way pneumatic valves for pipe connection/sub-base mounting

Port size	Orifice (mm)	Flow factors (L/min	Admissible differential pressure bar			Fluid temp. °C	Seat disc	Reference numbers				Power consumption (W)		Wt. (g)	El. Part Group *	Dim ref.
			Min	Max				Global valve reference	Valve reference no.	Housing	Coil	DC	AC			
G		Qn		DC	AC	Gas										


5/2 - Pilot operated -



Anod. aluminium body/Pipe mounting

3/8	8	1000	1	15	15	75	NBR	7341BAG3PN00	E341B11	2995	481865	9	8	1700	2	40
	8	1000	1	15	15	75	NBR			4270	481000	8	8	1800	2	

5/2 - Impulse coil -



Anod. aluminium body/Pipe mounting



1/4	8	1000	1	-	15	75	NBR	7345BAG2PN00	345B04	4269	484990	-	11	1800	4	38
	8	1000	1	15	-	75	NBR			4269	485400	13	-	1800	4	

Table continued on page 202

Notes:

* See Electrical Parts Group table at end of section

4-way pneumatic valves for pipe connection/sub-base mounting

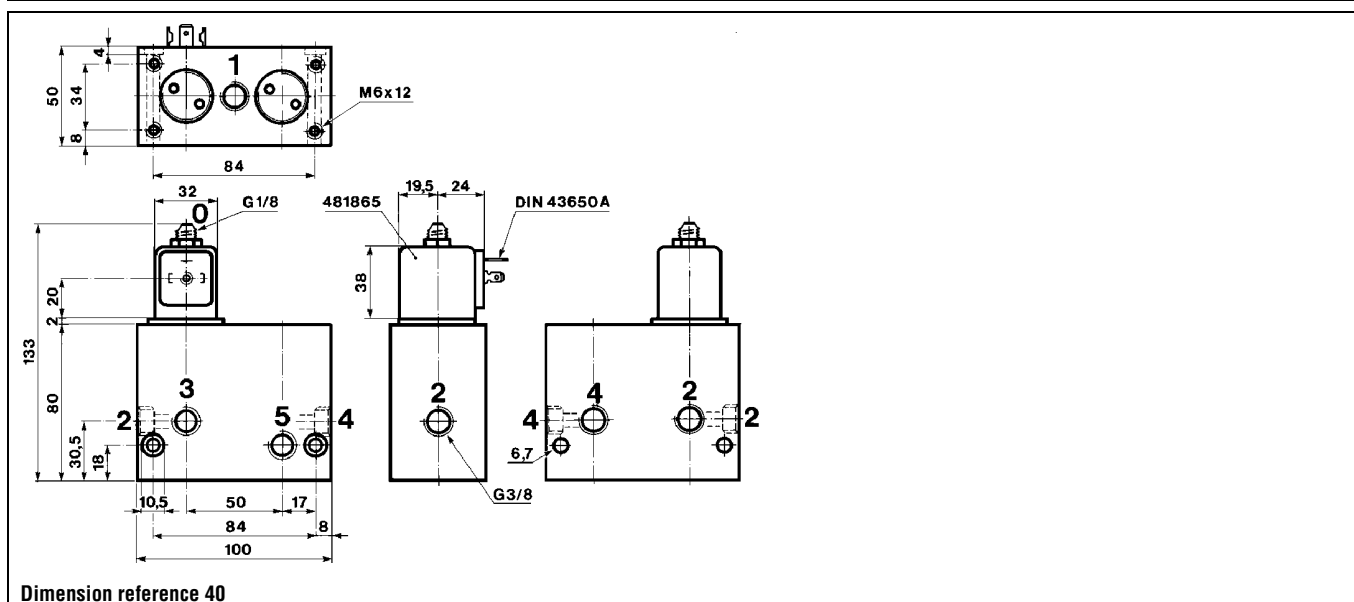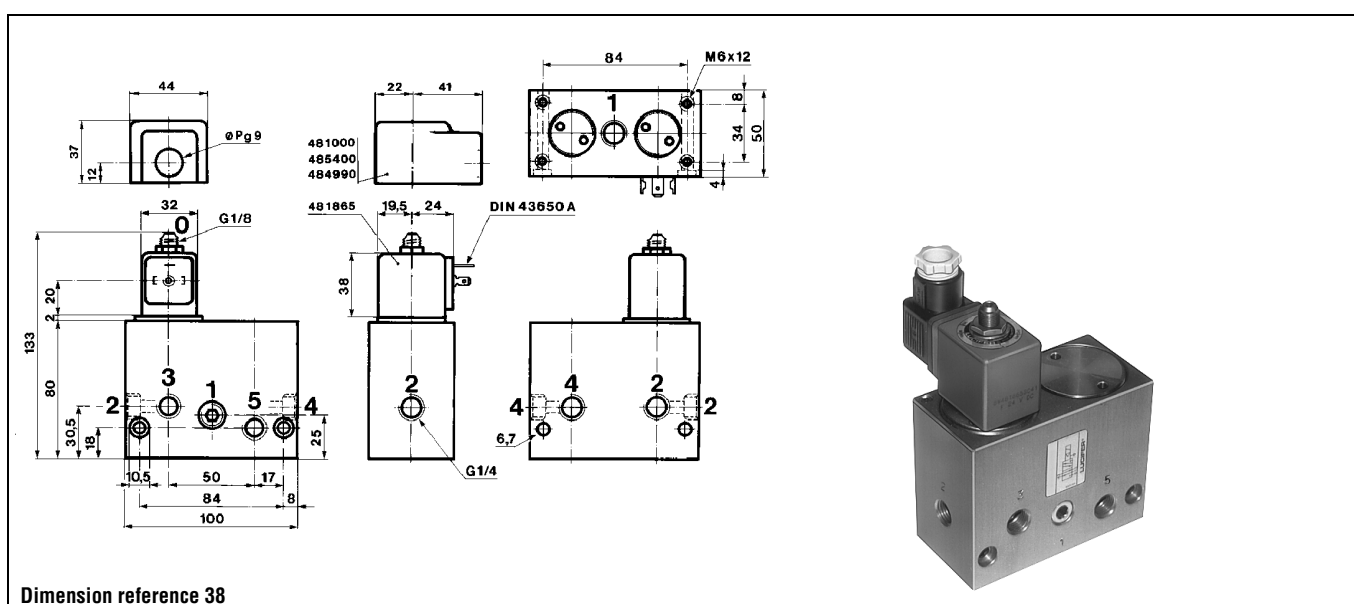


4-way pneumatic valves for pipe connection/sub-base mounting

Port size	Orifice (mm)	Flow factors (L/min)	Admissible differential pressure bar			Fluid temp. °C Gas	Seat disc	Reference numbers				Power consumption (W)		Wt. (g)	El. Part Group *	Dim ref.	
			Min	Max				Global valve reference	Valve reference no.	Housing	Coil	DC	AC				
G		Qn		DC	AC												DC

Die-cast zinc body/Pipe mounting

5/2 - Pilot operated -





1/4	8	1400	1	10	10	75	NBR	-	341L11	8993	488980	2.5	2	690	1	118
-----	---	------	---	----	----	----	-----	---	--------	------	--------	-----	---	-----	---	-----

Table continued on page 204

Notes:

* See Electrical Parts Group table at end of section


4-way pneumatic valves for pipe connection/sub-base mounting

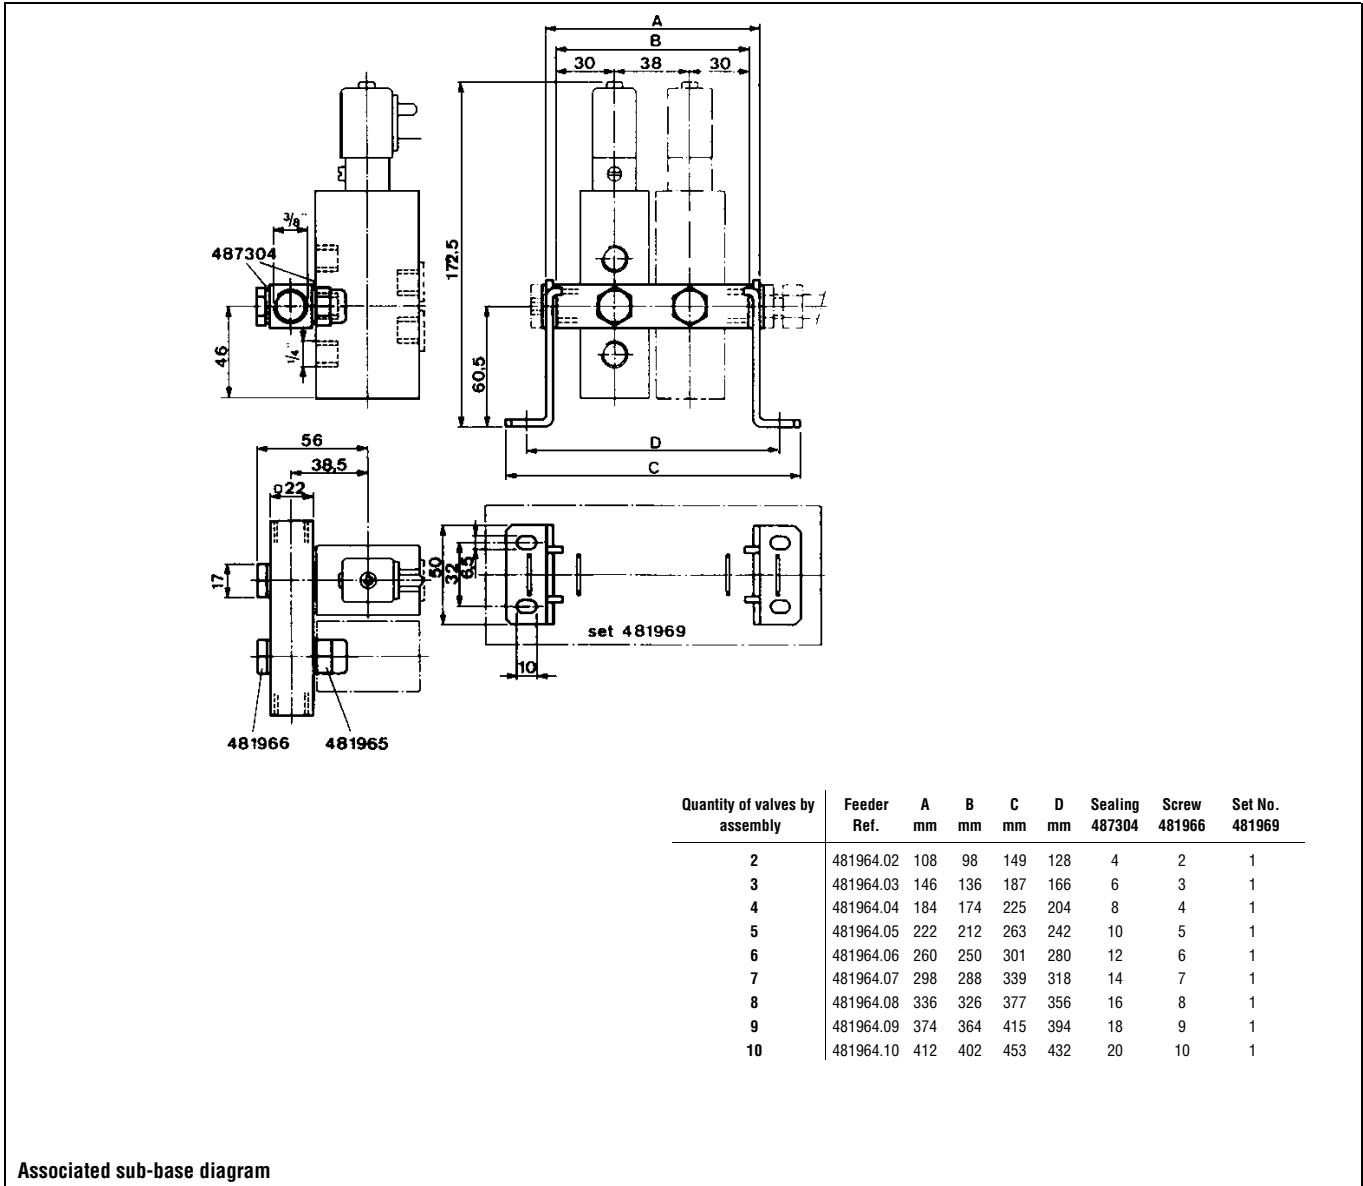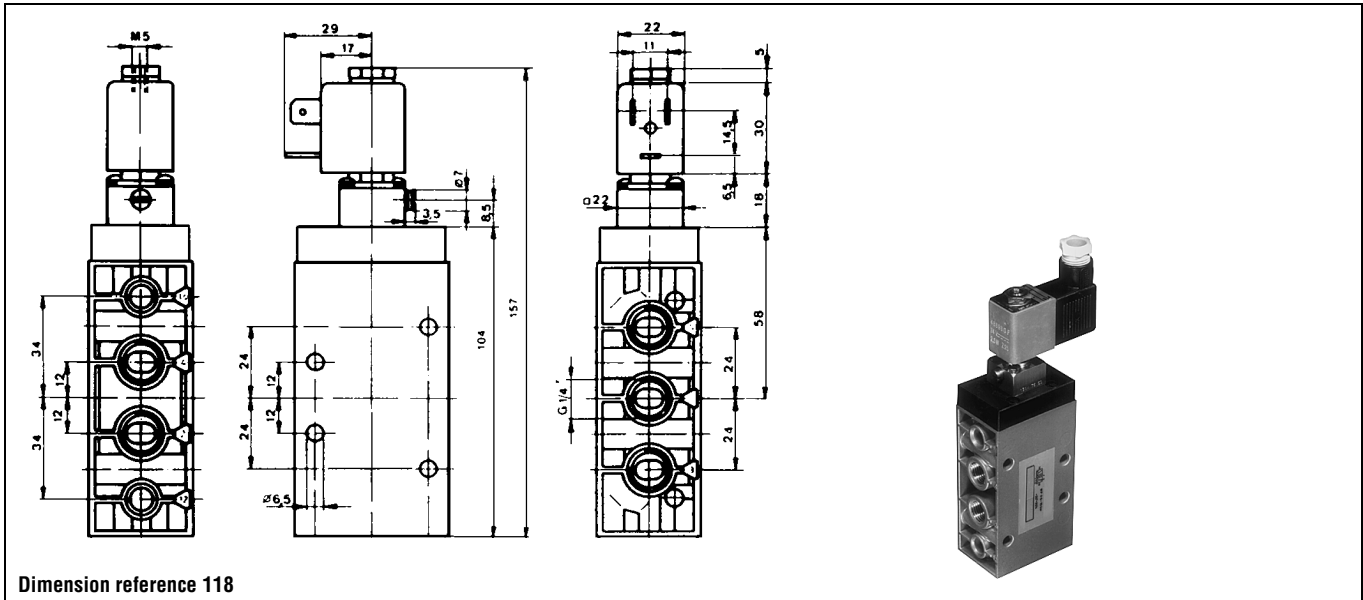

4-way pneumatic valves for pipe connection/sub-base mounting

Port size	Orifice (mm)	Flow factors (L/min	Admissible differential pressure bar			Fluid temp. °C Gas	Seat disc	Reference numbers				OR	Power consumption (W)		Wt. (g)	El. Part Group *	Dim ref.
			Min	Max				Global valve reference	Valve reference no.	Housing	Coil		DC	AC			
G		Qn		DC	AC												

5/2 - Pilot operated -



Die-cast zinc body/Pipe mounting

1/4	8	1400	1	10	10	75	NBR	-	341L1190	-	483580.01 ¹	0.4	-	690	7	7478
	8	1400	1	10	10	75	NBR	7341LMG2NNM0	E341L1130	2995	481865	9	8	-	2	3539
	8	1400	1	10	10	75	NBR			4270	481000	8	8	-	2	



Table continued on page 206

Notes:

* See Electrical Parts Group table at end of section

1. Other coil-housing available: 488650.01, 488660.01, 4888670.01 (refer to electrical parts at end of this section)

4-way pneumatic valves for pipe connection/sub-base mounting

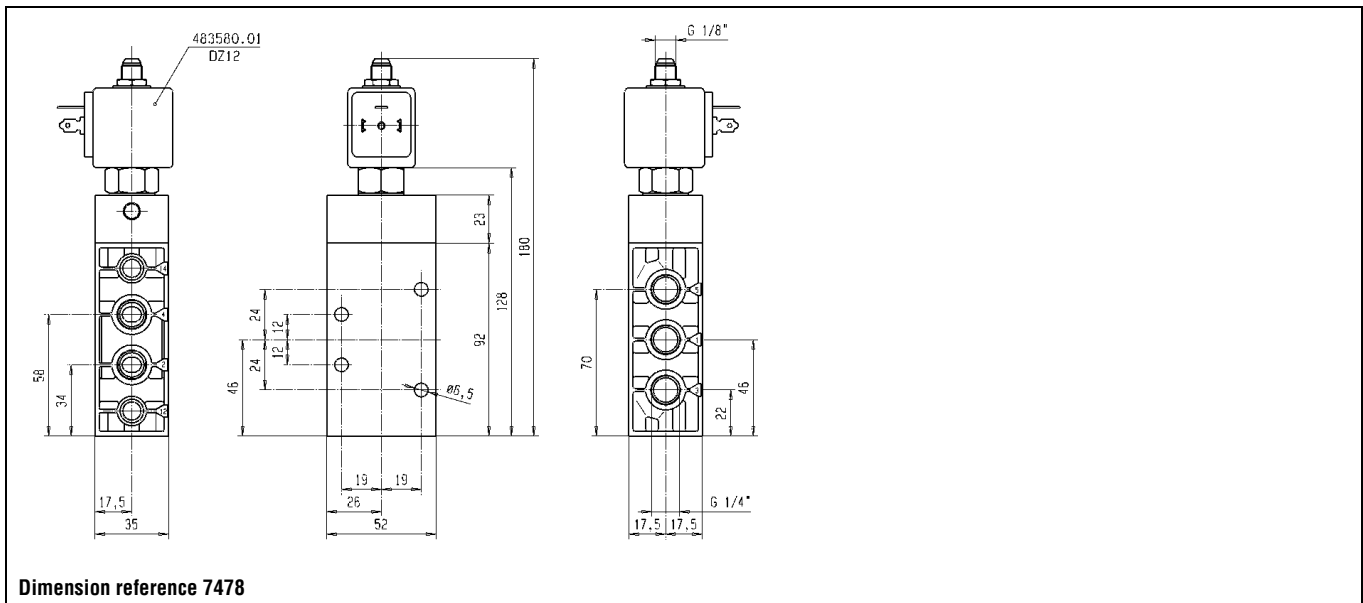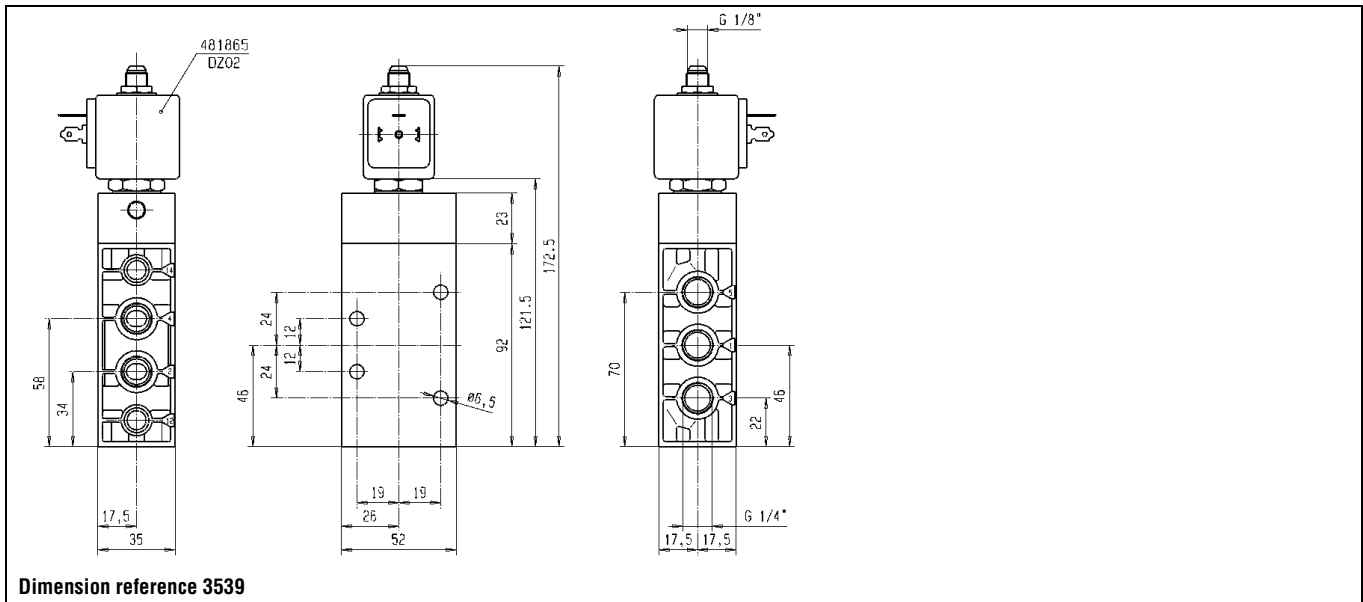


4-way pneumatic valves for pipe connection/sub-base mounting

Port size	Orifice (mm)	Flow factors (L/min)	Admissible differential pressure bar			Fluid temp. °C	Seat disc	Reference numbers				Power consumption (W)		Wt. (g)	El. Part Group *	Dim ref.
			Min	Max				Global valve reference	Valve reference no.	Housing	Coil	DC	AC			
G		Qn		DC	AC	Gas										

Die-cast zinc body/Pipe mounting

5/2 - Two solenoids and main pressure supply -




1/4	8	1400	1	10	10	75	NBR	-	347L11	8993	488980	1	2.5	2	750	1	46
-----	---	------	---	----	----	----	-----	---	--------	------	--------	---	-----	---	-----	---	----

Table continued on page 208


Notes:

- * See Electrical Parts Group table at end of section
- 1. Please order two housings and coils for each valve

4-way pneumatic valves for pipe connection/sub-base mounting

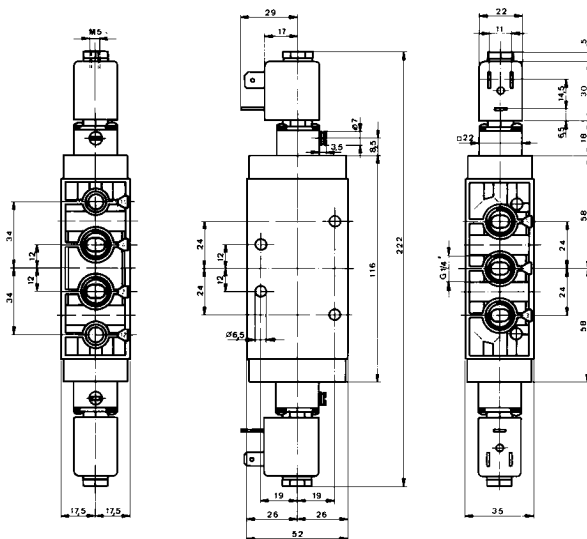

Dimension reference 46

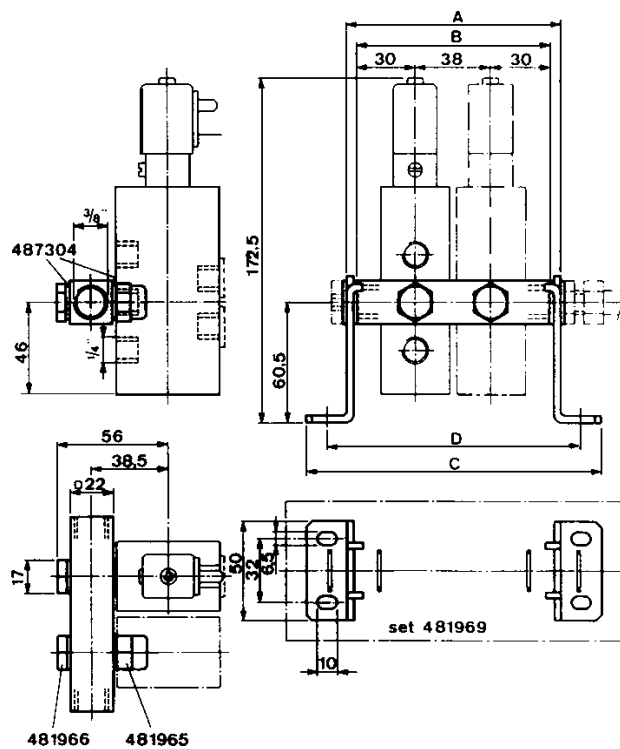

Quantity of valves by assembly	Feeder Ref.	A mm	B mm	C mm	D mm	Sealing 487304	Screw 481966	Set No. 481969
2	481964.02	108	98	149	128	4	2	1
3	481964.03	146	136	187	166	6	3	1
4	481964.04	184	174	225	204	8	4	1
5	481964.05	222	212	263	242	10	5	1
6	481964.06	260	250	301	280	12	6	1
7	481964.07	298	288	339	318	14	7	1
8	481964.08	336	326	377	356	16	8	1
9	481964.09	374	364	415	394	18	9	1
10	481964.10	412	402	453	432	20	10	1


Associated sub-base diagram

4-way pneumatic valves for pipe connection/sub-base mounting

Port size	Orifice (mm)	Flow factors (L/min)	Admissible differential pressure bar			Fluid temp. °C	Seat disc	Reference numbers				Power consumption (W)		Wt. (g)	El. Part Group *	Dim ref.	
			Min	Max				Global valve reference	Valve reference no.	Housing	Coil	DC	AC				
G		Qn		DC	AC	Gas											DC

Die-cast zinc body/Pipe mounting

5/2 - Two solenoids and main pressure supply -




1/4	8	1400	1	10	10	75	NBR	7347LMG2NNM0	E347L1130	2995	1	481865	1	9	8	-	2	3541
	8	1400	1	10	10	75	NBR			4270	1	481000	1	8	8	-	2	

Table continued on page 210

Notes:

- * See Electrical Parts Group table at end of section
- 1. Please order two of these items per valve

4-way pneumatic valves for pipe connection/sub-base mounting

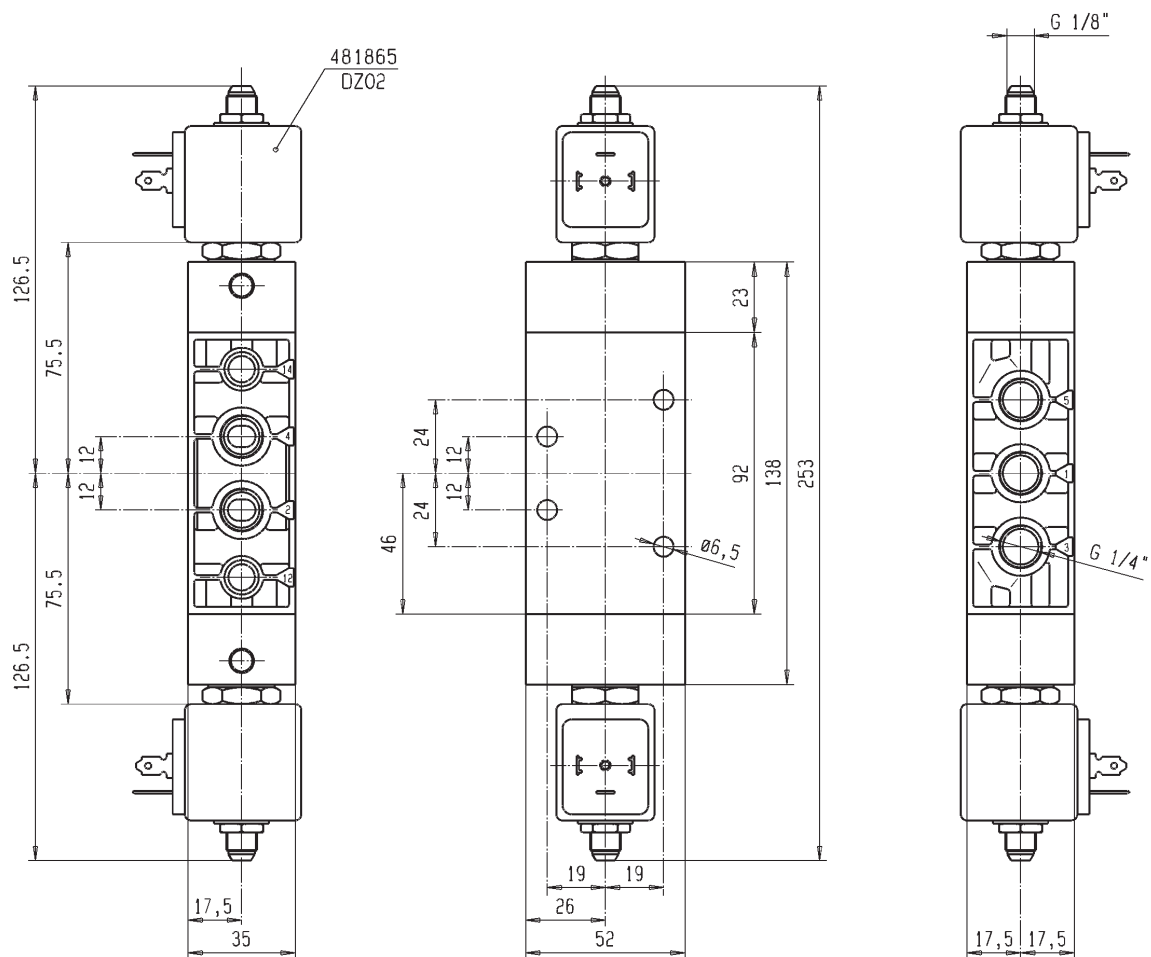

Dimension reference 3541